

**Profipress S**

Submittal Package

SG



**viega**

# table of contents

1	Product group description	3
2	Permitted pipes	5
3	Certificates	6
4	Z dimensions	7
5	Imprint	9

# Product group description

Flow-optimised press connector system made of copper (99.9 % Cu-DHP), gunmetal or silicon bronze for copper pipes. Press connectors for protecting the sealing element equipped with cylindrical pipe guide. The pressing force is located before and behind the sealing element seat. Suitable for concealed and pre-wall installations of riser pipes and floor installations.

## Marking

Manufacturer, pipe dimension, batch, approval markings (DVGW), white dot on press end, white rectangle with inscription »FKM«

## Press connector with SC-Contur

Inadvertently unpressed connections are noticed immediately during a leakage test.

Viega guarantees the detection of unpressed connections in the following pressure ranges:

min. water pressure: 0.1 MPa / 100 kPa / 1 bar / 14.5 PSI

max. water pressure: 0.65 MPa / 650 kPa / 6.5 bar / 94.3 PSI

min. air pressure: 22 hPa / 2.2 kPa / 22 mbar / 0.3 PSI

max. air pressure: 0.3 MPa / 300 kPa / 3 bar / 43.5 PSI

## Sealing elements

FKM (fluorocarbon rubber), matt black, pre-assembled

The use of Profipress S and Profipress connectors with FKM sealing elements in potable water and gas installations is not permitted!

## Note

The sealing materials of the press connector system are subject to thermal ageing, which depends on the media temperature and the operating time.

The higher the media temperature, the faster the thermal ageing of the sealing material progresses.

In the case of special operating conditions, e.g. industrial heat recovery systems, it is necessary to compare the specifications of the appliance manufacturer with the specifications of the press connector system.

Before using the press connector system beyond the areas of application described or if in doubt about the correct selection of material, please contact Viega.

## Dimensions

d12–35

## Tools

The functional safety of Viega press connector systems depends primarily on the faultless condition of the press tools used. Viega recommends the use of Viega press tools for pressing Viega press connectors. Viega press tools have to be regularly maintained by authorised service partners.

## Areas of application

Solar installations (flat plate/vacuum collector)

District heat supply systems

Low-pressure steam systems

Use for systems with additives (e.g. anti-corrosion or anti-freeze agents in heating water) or areas of application other than those described must be approved by Viega.

## Note

Use of the system for areas of application and media other than those described must be agreed in consultation with Viega! Detailed information about applications, restrictions and national standards and directives can be found in the product information, either printed or on the Viega website.

**Note – Standards and approvals**

Press connectors tested in accordance with DVGW Worksheet W 534 with DVGW test mark.

Press connectors suitable for copper pipes in accordance with DIN EN 1057 and DVGW Worksheet GW 392.

**Operating conditions solar installations (flat plate/vacuum collectors)**

operating temperature max. 140 °C / 284 °F

operating pressure max. 0.6 MPa / 6 bar / 87 PSI

**Operating conditions district heat supply systems**

operating temperature max. 140 °C / 284 °F

operating pressure max. 1.6 MPa / 16 bar / 232 PSI

**Operating conditions low-pressure steam systems**

operating temperature max. 120 °C / 248 °F

operating pressure max. 0.1 MPa / 1 bar / 14.5 PSI

The press connector system Profipress S is designed for nominal pressure PN 16.

Copper: 99.9 % Cu-DHP

gunmetal: CC499K

silicon bronze: CC246E / CuSi4Zn9MnP

**Subject to change without prior notice!**


Latest Z- and installation dimensions as well as further technical information can be found on the Viega website and have to be checked before purchase, planning, construction work and use. Our products are continuously optimised.

This product description contains important information on choice of product and system, mounting, commissioning as well as intended use and, if required, on maintenance measures. This information on products, their features and application techniques is based on currently valid standards in Europe (e.g. EN) and/or in Germany (e.g. DIN/DVGW). Some passages in the text may refer to technical regulations in Europe/Germany. These should be considered as recommendations for other countries where no corresponding national requirements exist. The relevant national laws, standards, regulations, directives and other technical provisions take priority over the German/European directives specified in this product description: The information herein is not binding for other countries and regions and should be understood as recommendation.


## Permitted pipes

standard	DN	external Ø	wall thickness
copper DIN EN 1057	10	12	0.8 1.0
	12	15	1.0
	15	18	
	20	22	
	25	28	1.0 1.5
	32	35	1.2 1.5
	40	42	
	50	54	1.5 2.0
	60	64.0	2.0
	65	76.1	
	80	88.9	
	100	108.0	2.5

# Certificates

SZU	<b>SZU Certificate</b> Profipress, Profipress S
 The ITB logo features a stylized, bold letter 'B' inside a square frame. Below the 'B' is the number '10'. 10	<b>ITB National Technical Assessment</b> Profipress, Profipress XL, Profipress S


# Z dimensions

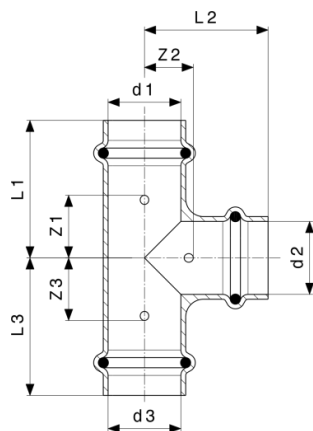

**Profipress S T-piece**  
- copper  
**Model 4518**

Article	d1	d2	d3	Z1	Z2	Z3	L1	L2	L3
<b>628 406</b>	12	12	12	18	9	18	36	27	36
<b>628 420*</b>	15	12	15	16	12	16	39	30	39
<b>628 413</b>	15	15	15	19	11	19	41	33	41
<b>628 444</b>	18	15	18	18	13	18	41	35	41
<b>628 437</b>	18	18	18	20	13	20	42	35	42
<b>627 843</b>	22	15	22	18	15	18	41	37	41
<b>628 550</b>	22	18	22	19	15	19	42	37	42
<b>628 451</b>	22	22	22	19	15	19	42	38	42
<b>628 574</b>	28	15	28	17	19	17	41	41	41
<b>628 581</b>	28	18	28	18	19	18	42	41	42
<b>628 598</b>	28	22	28	20	19	20	45	42	45
<b>628 567</b>	28	28	28	24	19	24	48	43	48
<b>628 611</b>	35	22	35	19	22	19	46	45	46
<b>628 628</b>	35	28	35	22	22	22	49	46	49
<b>628 604</b>	35	35	35	26	22	26	52	48	52


\* = Discontinued, limited availability



**Profipress S Adapter**  
- gunmetal or silicon bronze  
**Model 4512**

Article	d	Rp	Z	L	WS
628 857	12	3/8	7	32	21
628 864	15	1/2	7	44	26
628 871	18	1/2	6	43	26
628 888	18	3/4	10	45	31
628 895	22	3/4	11	47	31
628 901	22	1	14	52	38
628 918	28	1	14	52	38
628 925	35	1 1/4	14	54	47

WS = wrench size



**Profipress S Compensator**  
**Model 4551**

Article	d	Z	L	[!column name missing for ZM-000102]
629 083	15	100	144	23
629 090	18	104	148	27
629 106	22	102	149	34
629 113	28	121	168	41
629 120	35	123	174	50



# Imprint

**Viega GmbH & Co. KG**

Viega Platz 1  
57439 Attendorn  
Germany  
Phone: +49/2722/61-0  
Fax: +49/2722/61-1566

The Viega GmbH & Co. KG is represented by the general partners: Viega Management B.V. (Managing directors: Michael Klenz, Sebastian Leigemann) and Viega Management GmbH (Managing directors: Michael Klenz, Sebastian Leigemann)

The Submittal Package contains non-binding information that is being provided to you. All contents in the Submittal Package have been compiled with the greatest possible care and attention. Despite this, we are unable to guarantee that the information is up to date, accurate and complete. Placing an order does not automatically render the Submittal Package part of the contract.