

Sanpress

Submittal Package

SG



table of contents

1	Product group description	3
2	Permitted pipes	5
3	Certificates	6
4	Z dimensions	10
5	Imprint	28

Product group description

Flow-optimised press connector system with press connectors made of gunmetal or silicon bronze (change of material due to the current switch of production from gunmetal to the Viega worldwide uniform silicon bronze alloy) and pipes made of stainless steel 1.4401 and 1.4521. Press connectors for protecting the sealing element equipped with cylindrical pipe guide. Press connectors from d76.1 with stainless steel cutting ring to ensure the mechanical strength of the connection. For protection pipes are equipped with pipe plugs. The pressing force is located before and behind the sealing element seat. Suitable for concealed and pre-wall installations of riser pipes and floor installations.

Marking

Manufacturer, pipe dimension, batch, green dot on press end, yellow pipe plug for 1.4401, green pipe plug for 1.4521, detachable orange label as press indicator from d76.1

Press connector with SC-Contur

Inadvertently unpressed connections become visibly leaky when the system is filled.

Viega guarantees the detection of unpressed connections in the following pressure ranges:

min. water pressure: 0.1 MPa / 100 kPa / 1 bar / 14.5 PSI

max. water pressure: 0.65 MPa / 650 kPa / 6.5 bar / 94.3 PSI

min. air pressure: 22 hPa / 2.2 kPa / 22 mbar / 0.3 PSI

max. air pressure: 0.3 MPa / 300 kPa / 3 bar / 43.5 PSI

Sealing elements

EPDM (ethylene propylene diene rubber), black, pre-assembled

Note

The sealing materials of the press connector system are subject to thermal ageing, which depends on the media temperature and the operating time.

The higher the media temperature, the faster the thermal ageing of the sealing material progresses.

In the case of special operating conditions, e.g. industrial heat recovery systems, it is necessary to compare the specifications of the appliance manufacturer with the specifications of the press connector system.

Before using the press connector system beyond the areas of application described or if in doubt about the correct selection of material, please contact Viega.

Dimensions

d12–108.0

Tools

The functional safety of Viega press connector systems depends primarily on the faultless condition of the press tools used. Viega recommends the use of Viega press tools for pressing Viega press connectors. Viega press tools have to be regularly maintained by authorised service partners.

Areas of application

Potable water

Rainwater

Compressed air systems

Agriculture

Industrial applications

Note

The press connector system Sanpress is suitable for the creation of potable water installations according to DIN 1988-200 and EN 806-2 in consideration of the selection of material in accordance with DIN EN 12502-1 and according to the evaluation basis for metallic materials in contact with potable water of the Umweltbundesamt (UBA) (German Federal Environment Agency). When used for other areas of use and when in doubt about the right selection of material, please contact Viega. The system components should be protected against high concentrations of chloride generated by both the medium and by external factors. Detailed information about applications, restrictions and national standards and directives can be found in the product information, either printed or on the Viega website.

Note – Standards and approvals

Press connection system with press connectors made of gunmetal or silicon bronze (change of material due to the current switch of production from gunmetal to the Viega worldwide uniform silicon bronze alloy), pipes according to DIN EN 10088, DIN EN 10312, DVGW Worksheet GW 541 and W 534.

Pipe approval for 1.4521 (d12–108.0) according to DW-7301BS0375.

Pipe approval for 1.4401 (d12–108.0) according to DV -7301BS0411.

System approval for 1.4521 (d12–108.0) in accordance with DW-8501BS0377.

System approval for 1.4401 (d12–108.0) in accordance DW-8501AP3032.

For use in heating systems, observe VDI Regulation 2035 and DIN EN 12828.

Special applications

Shipbuilding

Operating conditions

The press connector system Sanpress can be used with the following operating parameters:

potable water installation according to DIN 1988-200 / DIN EN 806-2

operating temperature max. 80 °C / 176 °F

temperature max. 95°C over a period of 60 min.

heating systems in accordance with DIN EN 12828

operating temperature max. 105 °C / 221 °F

The press connector system Sanpress is designed for nominal pressure PN 16.

Copper: 99.9 % Cu-DHP

gunmetal: CC499K

silicon bronze: CC246E / CuSi4Zn9MnP

Subject to change without prior notice!









Latest Z- and installation dimensions as well as further technical information can be found on the Viega website and have to be checked before purchase, planning, construction work and use. Our products are continuously optimised.










This product description contains important information on choice of product and system, mounting, commissioning as well as intended use and, if required, on maintenance measures. This information on products, their features and application techniques is based on currently valid standards in Europe (e.g. EN) and/or in Germany (e.g. DIN/DVGW). Some passages in the text may refer to technical regulations in Europe/Germany. These should be considered as recommendations for other countries where no corresponding national requirements exist. The relevant national laws, standards, regulations, directives and other technical provisions take priority over the German/European directives specified in this product description: The information herein is not binding for other countries and regions and should be understood as recommendation.










Permitted pipes




pipe material	Model	Article	external Ø	wall thickness
stainless steel	2203	297 824	12	1.0
stainless steel	2203	102 036	15	1.0
stainless steel	2203	289 034	18	1.0
stainless steel	2203	102 708	22	1.2
stainless steel	2203	104 924	28	1.2
stainless steel	2203	108 588	35	1.5
stainless steel	2203	113 001	42	1.5
stainless steel	2203	193 676	54	1.5
stainless steel	2205	615 987	12	1.0
stainless steel	2205	615 994	15	1.0
stainless steel	2205	616 007	18	1.0
stainless steel	2205	616 014	22	1.2
stainless steel	2205	616 021	28	1.2
stainless steel	2205	616 038	35	1.5
stainless steel	2205	616 045	42	1.5
stainless steel	2205	616 557	54	1.5
stainless steel	2203XL	578 626	64.0	2.0
stainless steel	2203XL	354 862	76.1	2.0
stainless steel	2203XL	354 855	88.9	2.0
stainless steel	2203XL	354 848	108.0	2.0
stainless steel	2205XL	616 564	64.0	2.0
stainless steel	2205XL	616 571	76.1	2.0
stainless steel	2205XL	616 588	88.9	2.0
stainless steel	2205XL	616 595	108.0	2.0

Certificates


Dubai	Dubai Central Laboratory Department Attestation of Conformity Sanpress pipe 1.4521 and 1.4401
	ÖVGW certificate Sanpress / Profipress
	ÜA sign Raxinox pipes
	ÜA sign Sanpress, Raxofix, Maxiplex, bronze threaded fittings, solder fittings
	SAI Watermark Certificate of Conformity - Level 1 Propress Water, Sanpress and Sanpress Inox
	BCCA Certificate ATG Profipress, Sanpress, Sanpress Inox
AMTEC	AMTEC Certificate Profipress, Sanpress, Sanpress Inox, Prestabo, Megapress, Profipress G, Sanpress Inox G, Megapress G
DEKRA	examination certificate Piping system Sanpress/Sanpress XL
	DVGW type examination certificate Sanpress-pipe 1.4521 (d 12 - 108)
	DVGW type examination certificate Sanpress with pipe 1.4401 (d 12 - 108)
	DVGW type examination certificate Sanpress with pipe 1.4521 (d 12 - 108)

	<p>DVGW type examination certificate Sanpress pipe 1.4401 (d 12 - 108)</p>
	<p>TÜV Association Certificate Profipress, Sanpress, Sanpress Inox, Prestabo (d 15 - 108), Temponox</p>
	<p>ETA Certificate Profipress, Profipress XL, Sanpress, Sanpress XL</p>
	<p>ETA Certificate Sanpress with pipe 1.4401 and 1.4521, (d 12-108)</p>
	<p>Eurofins Certificate Profipress (d 12-54)</p>
	<p>CSTB Certificate Profipress, Sanpress</p>
	<p>CSTB QB Certificate Profipress, Sanpress</p>
	<p>CSTB QB Certificate Profipress, Sanpress</p>
<p>Eurofins</p>	<p>Eurofins Certificate of sanitary conformity Sanpress</p>
<p>BSI</p>	<p>BSI Kitemark Certificate (BS EN 1254-7) Profipress, Profipress G</p>
	<p>Lloyd's Register Type Approval Certificate Sanpress</p>
<p>EMI</p>	<p>EMI certificate Profipress, Sanpress, Easytop, Sanpress Inox, Pexfit Pro Fosta, Smartpress, gunmetal threaded fittings</p>

	<p>IRS Type Approval Certificate Seapress, Sanpress, Sanpress Inox, Profipress</p>
	<p>ICIM Hygiene certificate Profipress, Profipress XL, Sanpress Inox, Sanpress Inox XL, Sanpress, Sanpress XL, Sanfix Fosta, Raxofix, Smartpress, gunmetal threaded fittings, soldered fittings</p>
	<p>KIWA Product certificate Sanpress Inox pipe 1.4521 and 1.4401</p>
	<p>KIWA Product certificate Profipress, Sanpress fittings</p>
	<p>KIWA Product certificate PE-Xc Smartloop pipe</p>
<p>SINTEF</p>	<p>SINTEF Certificate Profipress, Profipress XL</p>
<p>SINTEF</p>	<p>SINTEF Certificate Sanpress with pipe 1.4401 and 1.4521 (d 12-108)</p>
<p>SINTEF</p>	<p>SINTEF Certificate Smartloop</p>
	<p>ITB National Technical Assessment Profipress, Profipress XL, Profipress S</p>
	<p>ITB National Technical Assessment Sanpress Inox, Sanpress Inox XL, Sanpress, Sanpress XL</p>
	<p>ITB National Technical Assessment Profipress, Sanpress</p>
	<p>ITB Certificate of Constancy of Performance Profipress, Sanpress</p>

EITS	EITS Technical Approval Profipress
EITS	EITS Technical Approval Sanpress, Sanpress Inox
	RISE Certificate Sanpress och Sanpress XL fittings
	RISE Certificate Smartloop
	SGBC Certificate Profipress
UKRCERTIFICATION	LLC UKRCertification Certificate of conformity Profipress
UKRCERTIFICATION	LLC UKRCertification Certificate of conformity Sanpress, Sanpress Inox


Z dimensions



Sanpress Elbow 90°
 - gunmetal or silicon bronze
Model 2216


Article	d	Z	L	Z*	L*
298 340	12	19	37		
103 750	15	17	39	23	45
281 267	18	18	40	24	46
104 818	22	26	49	28	51
106 348	28	32	56	35	58
111 953	35	34	59	48	74
119 560	42	35	71	56	92
199 395	54	43	83	70	110

Z* = predecessor

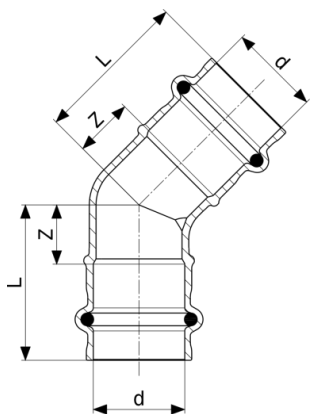


Sanpress Elbow 45°
 - gunmetal or silicon bronze
Model 2226

Article	d	Z	L
113 186	15	12	34
281 533	18	11	33
112 004	22	15	38
111 670	28	19	43
116 156	35	24	49

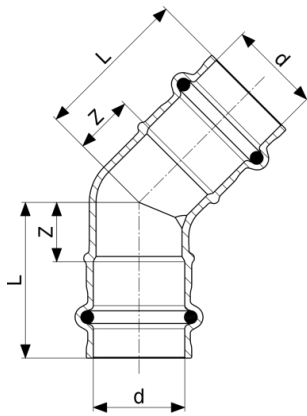

Sanpress Elbow 45°
- gunmetal or silicon bronze
Model 2226

Article	d	Z	L
128 531	42	23	59
197 506	54	32	72

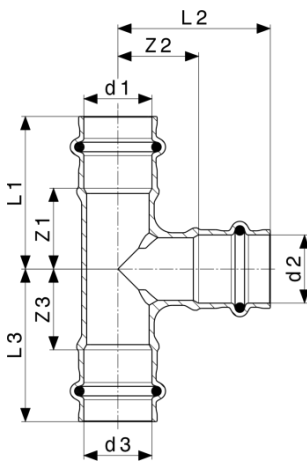


Sanpress T-piece
- gunmetal or silicon bronze
Model 2218

Article	d1	d2	d3	Z1	Z2	Z3	L1	L2	L3	Z1*
313 630	12	15	12	19	18	19	37	40	37	
298 371	15	12	15	21	22	21	43	39	43	
106 614	15	15	15	17	17	17	39	39	39	21
313 647	15	18	15	23	22	23	45	44	45	
298 388	15	22	15	24	23	24	46	47	46	
314 040	18	12	18	21	24	21	43	41	43	
281 397	18	15	15	21	21	20	43	43	42	
281 403	18	15	18	21	21	21	43	43	43	
281 410	18	18	18	23	23	23	45	45	45	
298 395	18	22	18	23	25	23	45	48	45	

Z* = predecessor

Z* = take-off dimension of the previous version

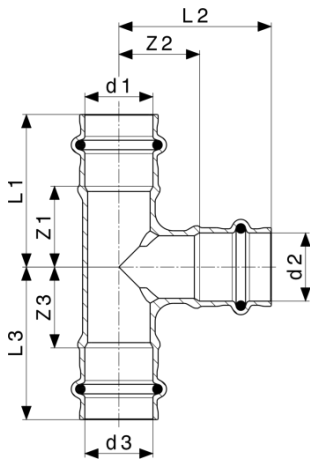


Sanpress T-piece
- gunmetal or silicon bronze
Model 2218

Article	d1	d2	d3	Z1	Z2	Z3	L1	L2	L3	Z1*
314 071	22	12	22	22	22	22	45	40	45	
121 600	22	15	15	27	24	20	50	46	42	
298 432	22	15	18	22	23	20	44	45	44	
109 165	22	15	22	22	24	22	45	46	45	
298 401	22	18	18	22	23	22	44	45	45	
281 380	22	18	22	22	23	22	45	45	45	
298 418	22	22	15	24	27	27	46	50	50	
109 257	22	22	22	27	27	27	50	50	50	
313 623	22	28	22	27	27	27	51	50	51	
283 513	28	15	28	23	27	23	46	49	46	
314 101	28	18	22	27	26	22	50	48	46	
298 425	28	18	28	23	26	23	46	48	46	
135 102	28	22	22	27	29	27	50	53	50	
111 625	28	22	28	27	29	27	50	53	50	
314 132	28	28	15	29	29	27	52	52	49	
314 163	28	28	18	29	29	27	52	52	49	
111 915	28	28	28	29	29	29	53	53	53	
283 520	35	15	35	21	31	21	47	53	47	
313 616	35	18	35	22	32	22	47	54	47	
314 194	35	22	28	26	30	24	50	54	50	
113 469	35	22	35	25	33	25	50	57	50	
121 754	35	28	28	27	33	29	53	57	53	
118 341	35	28	35	27	33	27	53	57	53	
115 265	35	35	35	31	28	31	57	53	57	31

Z* = predecessor

Z* = take-off dimension of the previous version

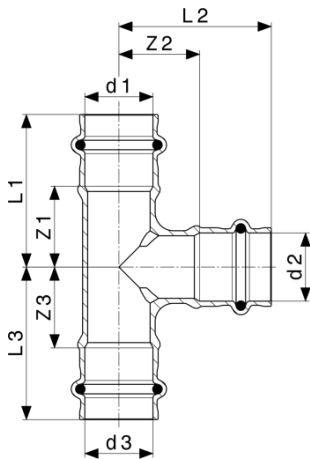


Sanpress T-piece
- gunmetal or silicon bronze
Model 2218

Article	d1	d2	d3	Z1	Z2	Z3	L1	L2	L3	Z1*
314 224	42	15	42	23	35	23	59	57	59	
283 537	42	22	42	23	36	23	59	59	59	
283 544	42	28	42	25	38	25	61	61	61	
283 551	42	35	35	29	37	31	65	62	57	
120 672	42	35	42	29	37	29	65	62	65	
121 259	42	42	42	32	32	32	68	68	68	
195 991	54	22	54	29	41	29	69	64	69	
283 568	54	28	54	29	41	29	69	64	69	
197 469	54	35	54	32	41	32	72	66	72	
187 279	54	42	42	34	39	37	70	75	77	
198 541	54	42	54	37	41	37	77	77	77	
199 364	54	54	54	43	43	43	83	83	83	

Article	d1	d2	d3	Z2*	Z3*	L1*	L2*	L3*
313 630	12	15	12					
298 371	15	12	15					
106 614	15	15	15	21	21	43	43	43
313 647	15	18	15					
298 388	15	22	15					
314 040	18	12	18					
281 397	18	15	15					
281 403	18	15	18					
281 410	18	18	18					
298 395	18	22	18					

Z* = predecessor

Z* = take-off dimension of the previous version

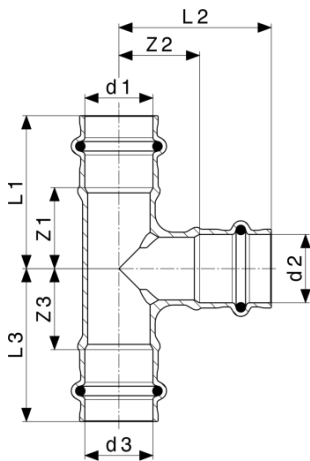


Sanpress T-piece
- gunmetal or silicon bronze
Model 2218

Article	d1	d2	d3	Z2*	Z3*	L1*	L2*	L3*
314 071	22	12	22					
121 600	22	15	15					
298 432	22	15	18					
109 165	22	15	22					
298 401	22	18	18					
281 380	22	18	22					
298 418	22	22	15					
109 257	22	22	22					
313 623	22	28	22					
283 513	28	15	28					
314 101	28	18	22					
298 425	28	18	28					
135 102	28	22	22					
111 625	28	22	28					
314 132	28	28	15					
314 163	28	28	18					
111 915	28	28	28					
283 520	35	15	35					
313 616	35	18	35					
314 194	35	22	28					
113 469	35	22	35					
121 754	35	28	28					
118 341	35	28	35					
115 265	35	35	35	31	31	57	57	57

Z* = predecessor

Z* = take-off dimension of the previous version

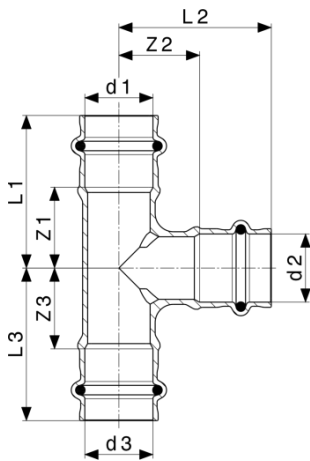


Sanpress T-piece
 - gunmetal or silicon bronze
Model 2218

Article	d1	d2	d3	Z2*	Z3*	L1*	L2*	L3*
314 224	42	15	42					
283 537	42	22	42					
283 544	42	28	42					
283 551	42	35	35					
120 672	42	35	42					
121 259	42	42	42					
195 991	54	22	54					
283 568	54	28	54					
197 469	54	35	54					
187 279	54	42	42					
198 541	54	42	54					
199 364	54	54	54					

Z* = predecessor

Z* = take-off dimension of the previous version




Sanpress Adapter
- gunmetal or silicon bronze
Model 2211

Article	d	R	Z	L	WS	Z*	L*	WS*
290 771	12	3/8	18	35	17	17	34	17
290 764	12	1/2	20	37	17	24	38	22
443 689	14	3/8	20	39	19	17	36	
443 696	14	1/2	25	44	19	22	41	22
297 985	15	3/8	17	39	19	20	42	
105 044	15	1/2	24	46	19	22	44	22
287 764	15	3/4	28	50	22	26	48	27
443 702	16	1/2	25	44	20			
443 719	16	3/4	27	46	22	25	44	27
283 490	18	1/2	23	45	22	21	43	22
283 230	18	3/4	27	49	22	25	47	27
297 961	22	1/2	25	49	27	22	45	27
104 306	22	3/4	26	49	27	27	50	27
287 771	22	1	33	56	30	32	55	34
297 954	28	3/4	29	52	32			
106 508	28	1	32	55	34			
297 978	28	1 1/4	35	58	34	38	62	42
297 947	35	1	28	53	40	30	56	
110 352	35	1 1/4	34	60	43	36	59	43
314 651	35	1 1/2	37	62	50	35	60	50
297 930	42	1 1/4	29	65	48			
115 340	42	1 1/2	30	66	50	31	67	50
314 668	54	1 1/2	38	78	62			
195 267	54	2	39	79	62			

WS = wrench size

Z* = predecessor

WS* = predecessor (wrench size)




Sanpress Adapter
- gunmetal or silicon bronze
Model 2212

Article	d	Rp	Z	L	WS	Z*	L*	WS*
291 075	12	3/8	7	32	21			
291 068	12	1/2	7	39	26			
443 726	14	1/2	7	41	26			
298 074	15	3/8	8	37	21			
107 543	15	1/2	7	44	26	11	43	
298 098	15	3/4	10	45	31	13		
443 733	16	1/2	7	41	26			
283 483	18	1/2	4	43	26	10	42	
294 519	18	3/4	10	45	31	12		
298 067	22	1/2	6	44	26	9	42	
108 465	22	3/4	11	47	31		44	
298 128	22	1	14	52	38		49	
428 174	28	1/2	10	44	33			
298 081	28	3/4	12	47	33		46	
114 329	28	1	14	52	38			40
298 104	28	1 1/4	18	55	47			
357 542	35	3/4	10	47	40			
298 111	35	1	8	48	39	9	46	40
116 774	35	1 1/4	14	54	47	15		
298 050	42	1 1/4	12	61	47			
124 236	42	1 1/2	10	69	53	14	64	
365 097	54	1 1/2	13	72	62	11		66
195 304	54	2	15	75	66	14	75	70

WS = wrench size

Z* = predecessor


WS* = predecessor (wrench size)



Sanpress Adapter union
- gunmetal
Model 2213


Article	d1	d2	L	Z	WS1	WS2
288 068	15	16	54	16	24	26

WS = wrench size




Sanfix P Plug-in piece
- gunmetal
Model 2113

Article	d1	d2	Z	L
303 822	16	15	33	52
303 815	16	18	31	51
331 528	20	18	30	52
304 744	20	22	32	54
566 678	25	22	33	57
566 685	32	28	36	64
566 692	40	35	40	69
566 708	50	42	51	86




Raxofix Plug-in piece
- silicon bronze
Model 5313

Article	d1	d2	Z	L
646 554	16	15	36	51
646 561	16	18	37	52
646 578	20	18	36	51
646 585	20	22	39	54



Raxofix Plug-in piece
- silicon bronze
Model 5313


Article	d1	d2	Z	L
646 592	25	22	40	60
646 608	32	28	41	61
646 615	40	35	47	74
646 622	50	42	62	89



Sanpress Adapter elbow 90°
- gunmetal or silicon bronze
Model 2214


Article	d	R	Z	L1	L2	WS	Z*	L1*	L2*
290 863	12	3/8	14	31	31	15	19	37	40
290 870	12	1/2	19	37	37	17	19	37	44
444 006	14	1/2	18	37	35	19	21	40	45
314 361	15	3/8	18	40	40	17	23	45	47
112 950	15	1/2	17	39	35	19	23	45	43
443 030	15	3/4	24	46	55	25	29	51	59
444 013	16	1/2	18	37	35	19	22	41	45
281 205	18	1/2	20	42	42	19	20	46	50
314 354	18	3/4	24	46	55	25			
115 623	22	3/4	21	44	41	25	28	51	59
118 730	28	1	35	58	58	31			72
127 329	35	1 1/4	33	58	58	39	48	74	88
128 500	42	1 1/2	29	65	60	51	20	42	42
197 988	54	2	43	83	80	55	70	110	120

WS = wrench size
Z* = predecessor



Sanpress Coupling
- gunmetal or silicon bronze
Model 2215


Article	d	Z	L
308 636	12	5	40
107 727	15	7	51
282 660	18	8	52
108 090	22	8	55
108 618	28	11	58
114 930	35	10	61
116 835	42	4	76
215 835	54	10	90



Sanpress Screw fitting
- gunmetal or silicon bronze
Model 2260

Article	d	Z	L	WS1	WS2
293 017	12	30	65	24	30
126 148	15	33	77	24	30
287 436	18	36	80	24	30
126 124	22	42	89	31	37
124 311	28	48	95	40	46
130 947	35	49	100	45	53
132 446	42	49	121	50	60
226 329	54	49	129	70	78


WS = wrench size



Sanpress Adapter union
- gunmetal or silicon bronze
Model 2262

Article	d	Rp	Z	L	WS1	WS2
293 024	12	½	23	56	27	30
131 937	15	½	26	63	27	30
133 160	15	¾	33	66	31	30
283 384	18	½	28	65	27	30
314 910	18	¾	36	68	31	30
125 318	22	¾	32	72	34	37
133 900	22	1	42	78	40	37
365 103	28	¾	23	63	32	46
128 975	28	1	33	76	44	46
138 875	35	1¼	36	83	50	53
141 745	42	1½	38	96	56	60
222 017	54	2	27	84	66	78


WS = wrench size



Sanpress Adapter union
- gunmetal or silicon bronze
Model 2265

Article	d	R	Z	L	WS1	WS2
291 372	12	⅜	40	58	30	27
291 389	12	½	44	61	30	27
120 108	15	½	46	68	30	27
140 878	15	¾	47	69	30	27
283 360	18	½	49	71	30	27
283 377	18	¾	50	72	30	27
142 674	22	½	50	74	37	34
119 133	22	¾	54	77	37	34


WS = wrench size



Sanpress Adapter union
- gunmetal or silicon bronze
Model 2265

Article	d	R	Z	L	WS1	WS2
148 492	22	1	54	78	37	34
365 110	28	¾	58	82	46	44
120 047	28	1	59	83	46	44
128 425	35	1¼	63	89	53	50
135 966	42	1½	69	105	60	55
221 997	54	2	67	107	78	70

WS = wrench size

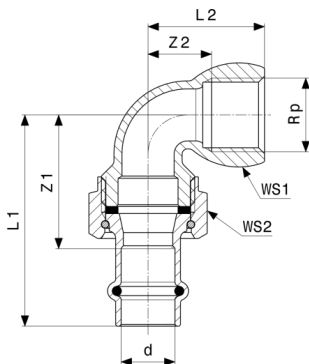


Sanpress Adapter union 90°
- gunmetal or silicon bronze
Model 2255

Article	d	Rp	Z1	Z2	L1	L2	WS1	WS2
292 980*	12	½	36	18	53	33	28	30
125 660	15	½	38	18	60	33	28	30
283 469	18	½	41	17	63	28	28	30
283 452	18	¾	43	22	65	33	33	36
122 614	22	¾	47	22	71	33	33	37
132 637	22	1	50	25	74	44	40	37
128 159	28	1	57	28	81	47	39	46
132 729	35	1¼	60	35	85	57	47	53
139 872	42	1½	72	38	108	59	55	60
221 676	54	2	74	43	114	69	69	78

WS = wrench size

* = Discontinued, limited availability




Sanpress Connection screw fitting
 - gunmetal or silicon bronze
Model 2263

Article	VdS	d	G	Z	L1	L2	WS
475 956		12	3/8	17	35	7	22
380 878		12	1/2	13	31	7	24
293 611		12	3/4	10	27	9	30
476 786		14	3/8	18	37	7	22
443 849		14	1/2	15	34	7	24
444 150		14	3/4	12	31	8	30
475 963		15	3/8	19	41	7	22
380 885		15	1/2	15	37	7	24
265 663		15	3/4	12	34	8	30
305 000		15	1	11	33	8	36
424 534		15	1 1/4	14	36	12	50
444 167		16	1/2	16	35	7	24
444 174		16	3/4	12	31	8	30
283 391		18	3/4	15	37	8	30
305 017		18	1	11	33	8	36
351 502		22	3/4	21	44	8	30
265 687	✓	22	1	16	39	8	37
367 015	✓	22	1 1/4	13	37	11	50
305 260	✓	22	1 1/2	13	37	8	52
692 629		28	1	19	42	8	37
265 700	✓	28	1 1/4	18	42	10	46
305 048	✓	28	1 1/2	15	39	11	52
265 731	✓	35	1 1/2	18	44	10	53
305 024	✓	35	2	14	39	12	65
265 304	✓	42	1 3/4	22	58	11	60
305 031	✓	42	2	20	56	14	66
426 743	✓	54	2 1/4	22	62	14	72
265 328	✓	54	2 3/8	13	53	12	78

VdS = VdS certification


WS = wrench size



Sanpress Connection screw fitting
- gunmetal or silicon bronze
Model 2263

Article	VdS	d	G	Z	L1	L2	WS
341 961	✓	54	2½	17	57	16	88
426 750	✓	54	2¾	16	56	17	88


VdS = VdS certification
WS = wrench size



Sanpress Connection screw fitting
- gunmetal or silicon bronze
Model 2264

Article	d	G	Z	L1	L2	WS
338 503	15	¾	41	49	8	29
338 510	18	¾	41	49	8	29
338 527	22	1	42	51	9	36
338 534	28	1¼	44	53	9	46
338 541	35	1½	46	56	10	52
338 558	42	1¾	63	74	11	59
338 565	54	2¾	55	68	13	75


WS = wrench size



Sanpress Insulating union
- gunmetal or silicon bronze
Model 2267


Article	d	Rp	Z	L	WS1	WS2
469 450	15	½	18	55	37	34
469 467	15	¾	25	64	37	34
469 474	18	½	20	58	46	44
469 481	18	¾	19	58	46	44
469 498	22	¾	21	63	55	50
469 504	22	1	23	65	55	50
469 511	28	1	23	65	55	50
469 528	35	1¼	21	68	70	62
469 535	42	1½	19	77	73	68
469 542	54	2	24	90	88	83

WS = wrench size



Sanpress Wall plate
- gunmetal or silicon bronze
Model 2225

Article	d	Rp	L	Z1	Z2	L1	L2	L3	L4
116 552	15	½	45	28	8	50	45	13	21




**Sanpress Mounting unit
Model 2221**

Article	d	Rp	L	DG	Z1	Z2	L1	L2	L3	L4
124 502	15	½	45	150/200	24	8	46	45	18	26

Article	d	Rp	L	DG	L5	L6	L7	L8	L9
124 502	15	½	45	150/200	70	100	150	200	222

DG = depth gauge




**Sanpress Mounting unit
Model 2222**

Article	d	Rp	DG	Z1	Z2	L1	L2	L3	L4	L5
295 462	15	½	150	24	12	40	22	17	25	25


Article	d	Rp	DG	L6	L7
295 462	15	½	150	50	150

DG = depth gauge




**Compensator
Model 2251**

Article	d	Z	L	[column name missing for ZM-000102]
690 250	15	100	144	25
690 267	18	104	148	27
690 274	22	102	149	34
690 281	28	121	168	41



**Compensator
Model 2251**

Article	d	Z	L	[column name missing for ZM-000102]
690 298	35	123	174	50
690 304	42	127	199	60
690 311	54	137	217	72



**Easytop Ball valve
Model 2275**

Article	DN	d	Z1	Z2	L1	L2	L3	H1	H2
746 377	15	15	20	20	42	42	43	69	15
746 384	15	18	20	20	42	42	43	69	15
746 391	20	22	21	20	45	43	43	72	18
746 407	25	28	26	26	49	50	51	91	22
746 414	32	35	34	27	59	52	51	97	28
746 421	40	42	37	32	73	68	60	119	34
746 438	50	54	44	38	84	78	60	127	41

Imprint

Viega GmbH & Co. KG

Viega Platz 1
57439 Attendorn
Germany
Phone: +49/2722/61-0
Fax: +49/2722/61-1566

The Viega GmbH & Co. KG is represented by the general partners: Viega Management B.V. (Managing directors: Michael Klenz, Sebastian Lelgemann) and Viega Management GmbH (Managing directors: Michael Klenz, Sebastian Lelgemann)

The Submittal Package contains non-binding information that is being provided to you. All contents in the Submittal Package have been compiled with the greatest possible care and attention. Despite this, we are unable to guarantee that the information is up to date, accurate and complete. Placing an order does not automatically render the Submittal Package part of the contract.